

A



SHEER MR-100  
MATERIAL ID#200917  
FABRIC BY PROCUREMENT  
FABRICATION AND INSTALLATION  
BY FABRICATOR

**CORRIDORS - SHEERS ONLY**

*Standard Fabrication Details*

- Ripplefold
- Hanky hem with string weight
- Cord-operated traverse rods are not preferred
- 3" high drapery pocket in ceiling where possible to conceal hardware and top hem (New Construction)
- Hardware is Forest Group USA #CM-512 or equal, mounted tight to ceiling not wall-mounted brackets
- Center draw typical
- Ceiling height up to 8'-0" AFF
- 120% Fullness
- Fully-operable
- White batons to a 3'-0" maximum length

1. ALL INSTALLATIONS ARE TO OCCUR AFTER ALL PAINTING AND FINISH WORK IS COMPLETED AND AMBIENT TEMPERATURE AND HUMIDITY CONDITIONS ARE MAINTAINED TO INTENDED LEVEL.
2. INSTALLER REQUIRED TO V.I.F. (VERIFY IN FIELD) ALL REQUIRED MEASUREMENTS AND SIRE CONDITIONS AND ADJUST DRAPERY ACCORDINGLY.

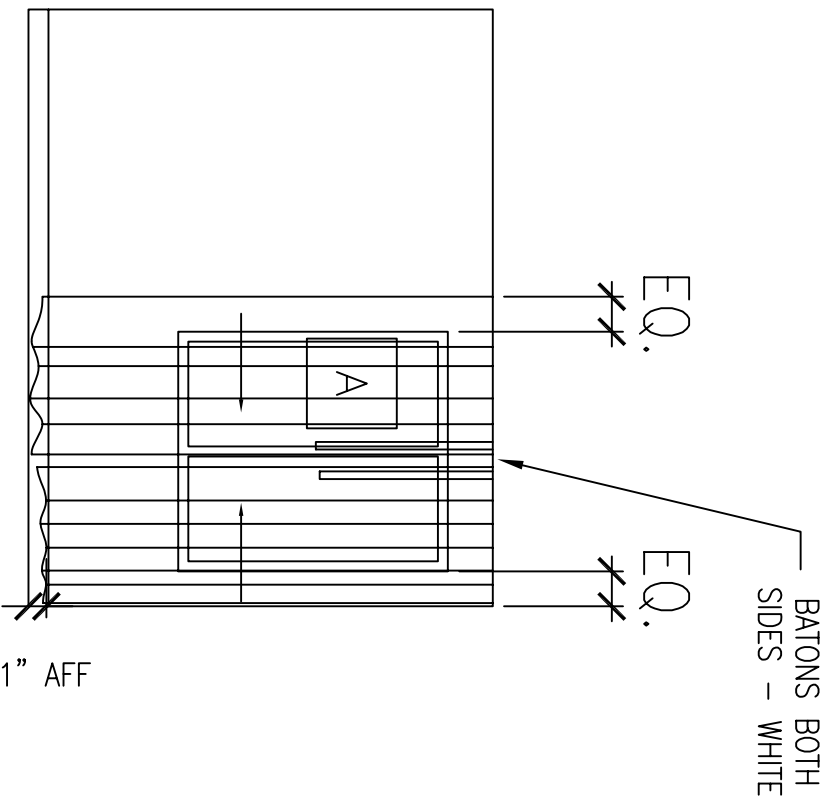

**CORRIDOR ELEVATION**

SCALE: NTS

**CORRIDOR DRAPERY**

SCALE: NTS (NOT TO SCALE)

DATE ISSUED: 03/08/10

