

A



SHEER MR-100
MATERIAL ID#200917
FABRIC BY PROCUREMENT
FABRICATION AND INSTALLATION
BY FABRICATOR

CORRIDORS - SHEERS ONLY

Standard Fabrication Details

- Ripplefold
- Hanky hem with string weight
- Cord-operated traverse rods are not preferred
- 3" high drapery pocket in ceiling where possible to conceal hardware and top hem (New Construction)
- Hardware is Forest Group USA #CM-512 or equal, mounted tight to ceiling not wall-mounted brackets
- Center draw typical
- Ceiling height up to 8'-0" AFF
- 120% Fullness
- Fully-operable
- White batons to a 3'-0" maximum length

1. ALL INSTALLATIONS ARE TO OCCUR AFTER ALL PAINTING AND FINISH WORK IS COMPLETED AND AMBIENT TEMPERATURE AND HUMIDITY CONDITIONS ARE MAINTAINED TO INTENDED LEVEL.
2. INSTALLER REQUIRED TO V.I.F. (VERIFY IN FIELD) ALL REQUIRED MEASUREMENTS AND SIRE CONDITIONS AND ADJUST DRAPERY ACCORDINGLY.

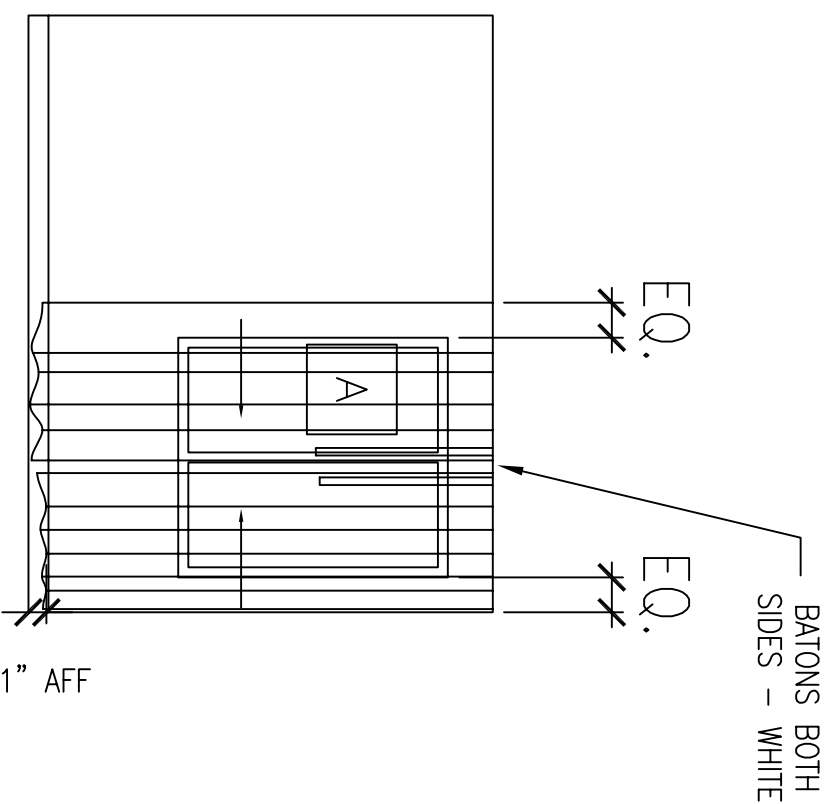

CORRIDOR ELEVATION

SCALE: NTS

CORRIDOR DRAPERY

SCALE: NTS (NOT TO SCALE)

DATE ISSUED: 03/08/10

